




EQUIPMENT SALES | PARTS | MANUFACTURING

BF10 BAG FLATTENER CONVEYOR

The BF10 Bag Flattening Conveyor
Designed to even the product within the bag,
remove trapped air and flatten the bag for
manual or automatic stacking.

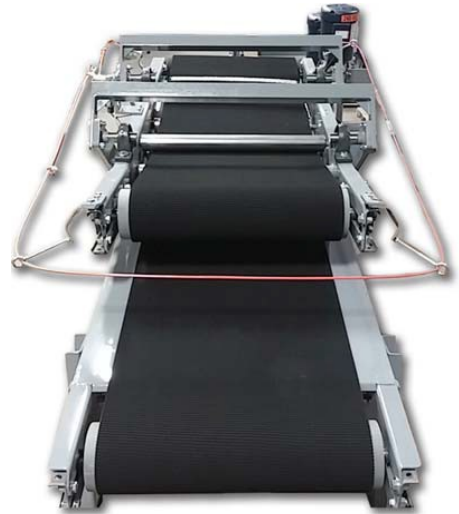

10 foot, 15° inclined conveyor with an opposed 5½ foot long conveyor.

With timed gear motors and parallel linkage conveyor assemblies
to remove trapped air and flatten bags.

12 inch inlet and 42 inch discharge heights are standard.

Designed to flatten bags to be palletted with more precision.

Bags that have been flattened tend to make pallets squarer, hold together
better and have less freight damage than pallets with un-flattened bags






JEM International

6873 Martindale • Shawnee, KS 66218

Phone: 913-441-4788 • info@jemscales.com

www.JemBaggingScales.com

Note
Inlet height: 12"
Discharge height : 42"
Please advise if different heights are needed

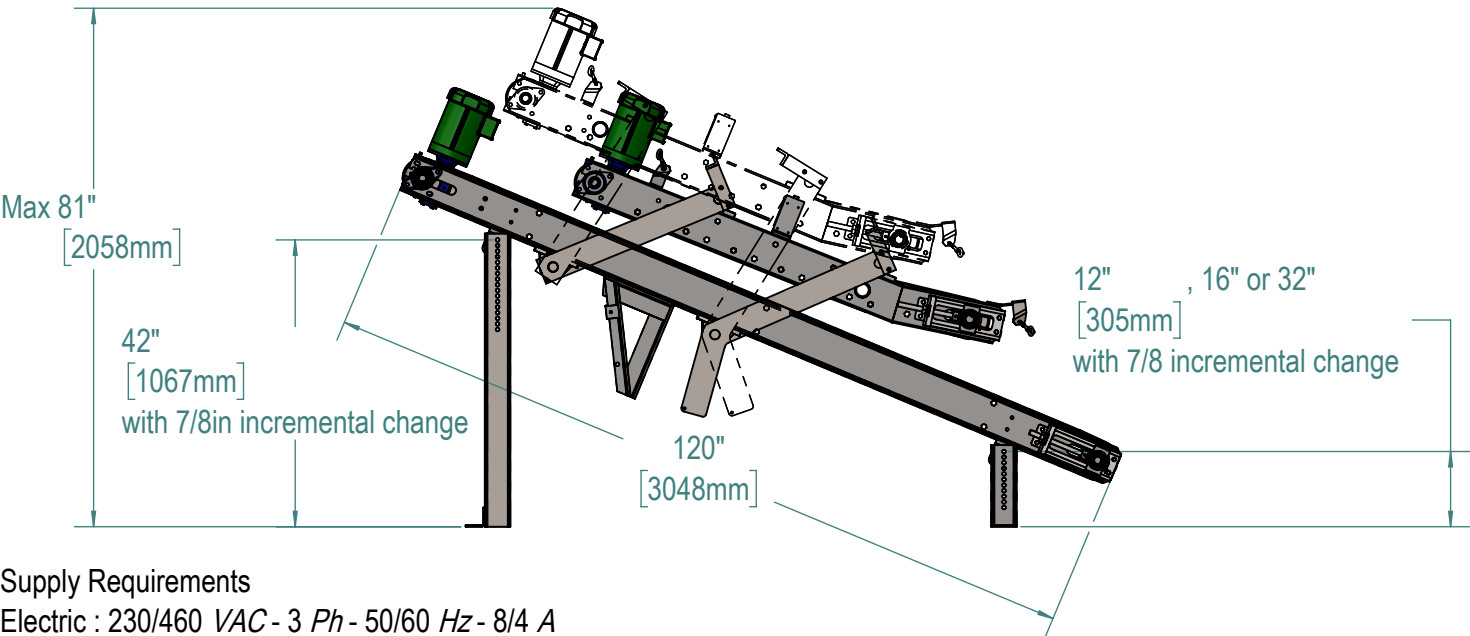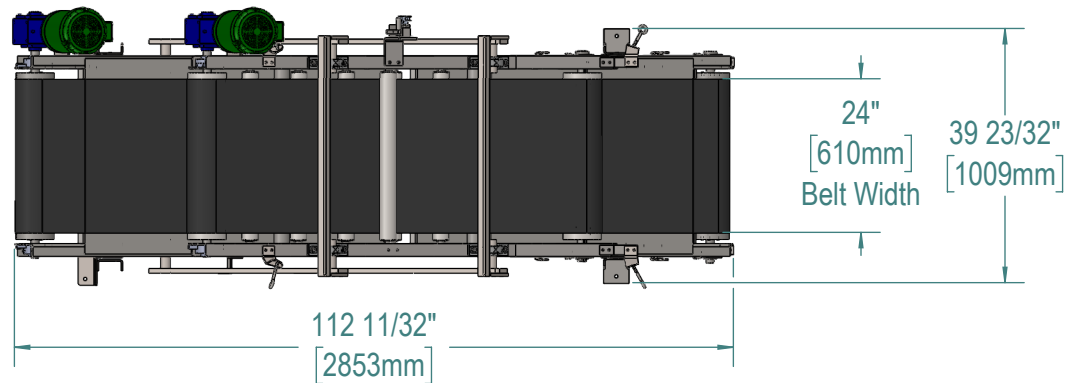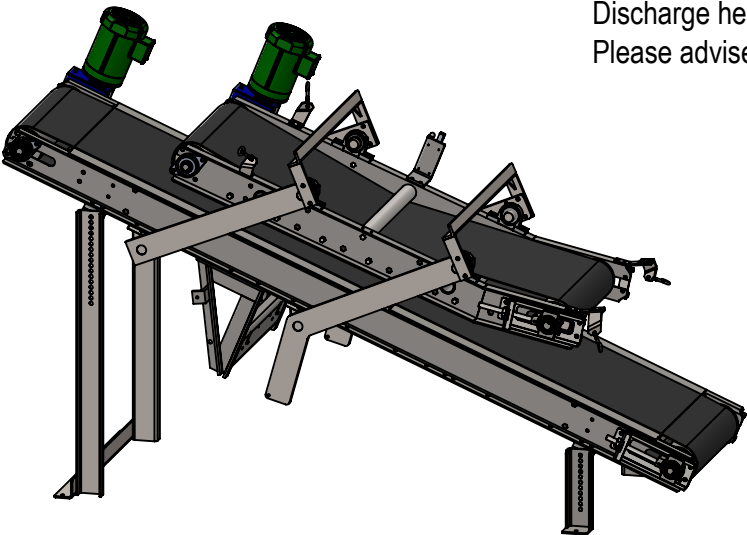

Supply Requirements
Electric : 230/460 VAC - 3 Ph - 50/60 Hz - 8/4 A
Pneumatic : 2 cfm at 80 psi

APPROVED

Proprietary and Confidential
The information contained in this drawing is the sold property of JEM International, Inc. Any reproduction in part or as whole without the written permission is prohibited.

Purpose
The purpose of this drawing is only for reference and a demonstration for a customer. Actual size may differ slightly.

Drawn : Jimmy K Date :10/30/2020 Rev : 01

☐ As Shown ☐ As Noted	☐ As Shown ☐ As Noted
Name : _____	Name : _____
Signature : _____	Signature : _____
Date : _____	Date : _____
Note : _____	Note : _____

 JEM INTERNATIONAL INC.
Name : Bag Flattening Incline Conveyor (BF10)
For/Para :
Drawing NO. : BF10
(1/1)