



EQUIPMENT SALES | PARTS | MANUFACTURING

ROADRUNNER

**GROSS WEIGH DIGITAL BAG FILLING SCALE
MODEL: GWD-RR-CG ROADRUNNER**



BRETT MATTSON · OFFICE (913) 441-4791 · CELL (913)-486-8647 · EMAIL brettm@jemscales.com

JEM INTERNATIONAL · 6873 MARTINDALE · SHAWNEE, KS 66218 · USA · PHONE (913) 441-4788 · FAX (913) 441-1711

WEBSITE: www.jembaggingsscales.com

ROADRUNNER

GROSS WEIGH DIGITAL BAG FILLING SCALE MODEL: GWD-RR-CG



The GWD Roadrunner provides an economical approach to filling bags from 10 lbs. To 110 lbs. Typical production speeds are 8-9 bags per minute at 2 to 4 ounce (50-100 gram) accuracy.

Comes standard with two 220 lb. Single point compression load cells, pneumatic gravity gate, air operated center grip spout with foot pedal clamp activation, complete electrical and pneumatic controls package with transformer for 24V (low voltage) controls.



- **IT1-Panel Mount digital scale controller is NTEP-Approved and includes auto-start and bag release timer.**
- **Adjustable product flow meter for various bag weights and/or product bulk densities.**

Available Options

- **Stainless steel contact surfaces or all stainless-steel construction.**
- **Dust Tight Spout with dust port connections.**

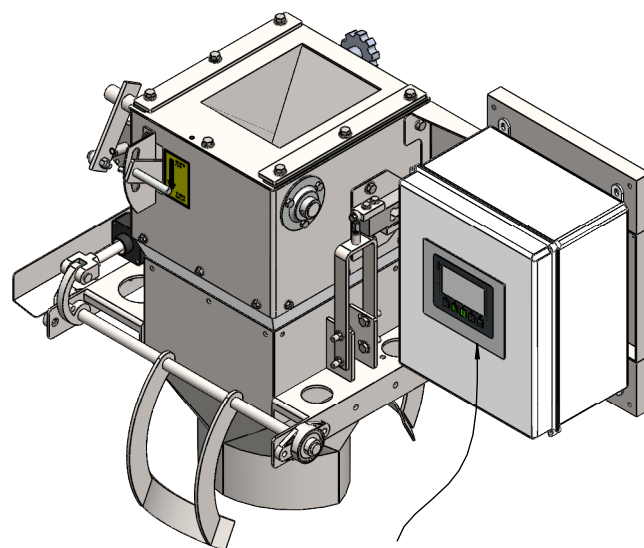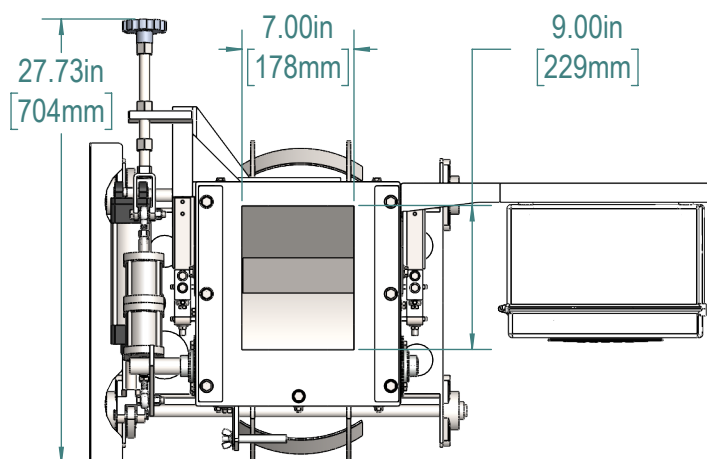

IT1
Scale Controller

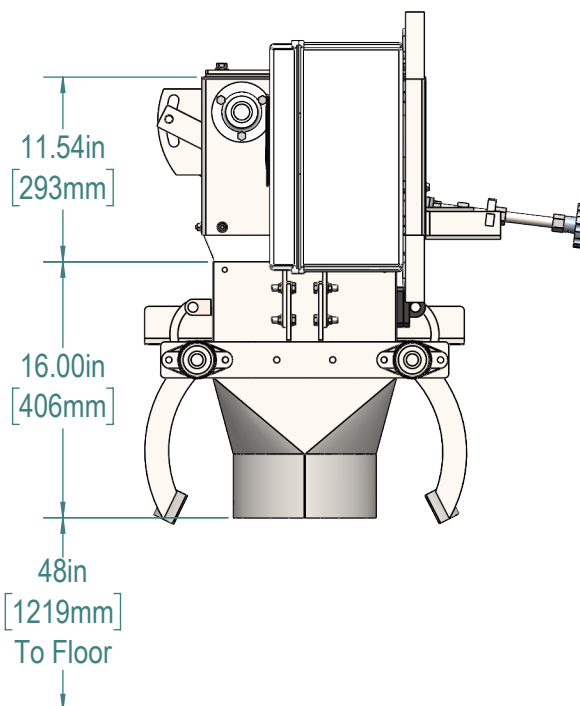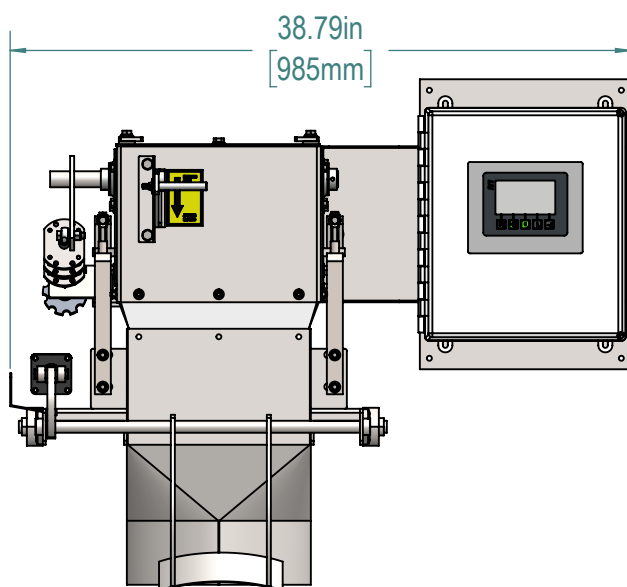

APPROVED

Proprietary and Confidential
The information contained in this drawing is the sold property of JEM International, Inc. Any reproduction in part or as whole without the written permission is prohibited.

Purpose
The purpose of this drawing is only for reference and a demonstration for a customer. Actual size may differ slightly.

Drawn : Jimmy K Date : 6/22/2021 Rev : 01

☐ As Shown ☐ As Noted	☐ As Shown ☐ As Noted
Name : _____	Name : _____
Signature : _____	Signature : _____
Date : _____	Date : _____
Note : _____	Note : _____

JEM INTERNATIONAL INC.	
Name : GWD RoadRunner-Center Grip-IT1	
For/Para :	
Drawing NO. : GWD-RR-CG-IT1	(1/1)

IT1



Universal Weighing Terminal, W&M Approved, for Industrial Use

IT1 – Universal Industrial Weighing Terminal

Stainless steel housing IP69K

Suitable for harsh environment weighing locations. With mounting brackets for desk-top or wall-mount installation. Integrated power supply unit, sealed cable glands for all cable connections.

Color display

For indication of weight, multi-lingual operator prompts and calibration dialog. With backlighting, 11 cm (4.3") display.



Keyboard

With function keys for zero setting, taring, printing, totalizing and special functions.

Power supply

110–240 VAC or 12–30 VDC (integrated) for stationary use or 12–30 VDC (integrated) for mobile use.

Universal Use

Suitable for difficult environmental conditions and locations with high hygienic standards, as in the food, pharmaceutical and chemical industry.

High Operational Security

Fast and error-free operation is ensured by a color display for the indication of weight, IDs and operator prompts.

Weighing Electronics

IT1 connects to one scale with up to 8 loadcells, 350 Ohm each and provides a W&M approved resolution of up to 10,000 d with max. 80 % preload.

Calibration is possible as single or multiple-range (e.g. 3 x 3,000 d) and as single or multi-interval scale.

Weighing Program

Display of net, tare and gross weight. Operator prompting for capturing of weight or piece count. Totalizing is also possible. Plug-on modules are used to set up the IT1 for applications of varying complexity.

Data Logging

Via optional printer interface. The print layout for labels or forms is configurable. Printout of weights, totals, date, time and consecutive-no.

Data Transmission To PC

Via optional PC interface. Transmission of date, time, consecutive-no. and weight after each weighing cycle.

PC ONLINE Mode

Via optional PC interface. Reading of weight, taring, zero setting and other functions can be remotely controlled from a PC.

Weights can be stored in an internal W&M approved data archive for verification. Data transmission is possible through serial interface or Ethernet LAN.

Switching And Filling

With optional input/output modules 3 weight thresholds can be monitored, e.g. for max. or min. values.

Start of weighing cycle and taring is possible from external switches.

Alternatively the inputs and outputs can be used for a filling sequence with start/stop/interrupt and two-speed cut-off.

IT1 – Technical Data

Construction

Compact stainless steel housing protected to IP69K, for desk-top, wall-mount and column-mount installation or as panel-mount version, suitable for harsh environments, all cable connections through sealed cable glands.

Display and keyboard

Bright 4.3" (11 cm) color screen for indication of weight and operator prompts and calibration.

Sealed membrane keyboard with tactile feedback, with soft keys for zero setting, taring, printing, totalizing and special functions.

Weighing electronics

Integrated signal amplifier for the connection of up to 8 strain gauge loadcells, 350 Ohm each, W&M approved resolution of up to 10,000 d at 80 % preload.

Internal resolution 524,000 d, 50–800 updates per second, smallest loadcell signal 0.33 mV/e.

Calibration as single or multiple range scale with 1, 2 or 3 ranges or as multi-interval scale.

Calibration with test weights or through entry of rated output of loadcell(s), option for the linearization of the load curve. Clear operator prompts for all steps of calibration sequence.

Optional interface modules for digital loadcells Flintec RC3D or HBM C16i.

Electrical connection

110–240 VAC, 50/60 Hz or 12–30 VDC

via integrated power supply unit, or

12–30 VDC for power supply via external battery.

Operating temperature

–10 °C (+14 °F) to +40 °C (+104 °F), 95 % relative humidity, non-condensing.

Interface options

One socket for serial or Ethernet interface and one socket for digital I/Os or analog output:

PC interface, selectable Ethernet, RS232, RS422 or RS485, configurable as 'data transmission after each weighing cycle' or 'in request mode'.

Printer interface, selectable USB, Ethernet, RS232 or RS485, for the connection of a form or ticket printer, printout configurable via display and keyboard.

Interface for remote display, selectable RS232, RS485 or Ethernet, several protocols configurable.

2 digital inputs and 2 digital outputs

Optoisolated, 24 VDC, outputs for setpoint monitoring or simple filling applications, inputs for start of weighing and taring or start/stop of filling.

Additional digital output

Optoisolated, 24 VDC, for +/– check or setpoint monitoring.

Analog output

0–20 mA, 4–20 mA, 0–10 V or 2–10 V, 15 bit, 32,000 divisions, for analog output of weight.

Further options

Internal W&M approved data archive

To record the latest 1,000,000 weighing results.

Remote diagnostics

Via Ethernet-/Internet connection with integrated web server.

PC Software Tool PC COM+ | PC ARCHIVE

For communication with customer's PC software, with optional W&M approved recording of weighing data on a PC hard disk.

PC Software Tool PC ReadIT

For the reception of weighing data and storage in an ASCII file or a database.

Splash and dust cover

Transparent plastic cover to protect display and keyboard.

Construction:

Desk-top or wall-mount installation



- Stainless steel housing, IP69K
- Desk-top installation
- Dimensions W x H x D: 168 x 167 x 115 mm (6.6" x 6.6" x 4.5")

- Stainless steel housing, IP69K
- Wall-mount installation
- Dimensions W x H x D: 168 x 151 x 111 mm (6.6" x 5.9" x 4.4")

Panel-mount version



- Stainless steel housing, fascia plate protected to IP69K
- Panel-mount installation
- Dimensions W x H x D: 182 x 145 x 47 mm (7.2" x 5.7" x 1.9")
- Cut-out in panel: 165 x 129 mm (6.5" x 5.1")

Directives: 2014/31/EU, 2014/30/EU, 2014/35/EU

 EC approval as non-automatic weighing instrument

Standards: EN 45501, OIML R76-1, EN 61000-6-2, EN 61000-6-3, NAMUR NE21, EN 60950