

4-BAGGER CONVEYOR WITH PORTABLE SEWING HEAD

DESIGNED FOR ONE OPERATOR TO BAG FILL, CLOSE AND STACK AT A RATE OF 4 BAGS PER MINUTE.

THE 8-FOOT BAG CLOSING CONVEYOR INCLUDES:

- A 12-inch-wide belt
- 1HP AC motor with variable speed, back rail
- Two-position foot pedal and wand switch for single operator controls
- An adjustable height portable pedestal for use with Newlong or Fischbein Portable Sewing Heads or an AIE Impulse heat sealer



Shown with
GWM Wolverine
Gross Weigh
Mechanical
Bagging Scale



THE GWM WOLVERINE

The Wolverine provides an economical approach to filling bags from 10 lbs. to 110 lbs. (5 kg – 50kg).



**WATCH THE
4 BAGGER
CONVEYOR IN USE**

- Typical production speeds are 4 to 5 bags per minute at +/- 4 ounce (100 gram) accuracy.
- GWM scales can be supplied with a variety of spout sizes to accommodate your specific bag dimensions.
- Flex-Belt and Auger feeders are available to handle products that are not free flowing in nature.
- The scales are available in mild 10 gauge steel or can be supplied with stainless steel product contact surfaces or all stainless steel construction for corrosive or food grade products such as salt, fertilizer and various food products.
- The GWM comes standard with a cam grip spout sized for your specific bags.
- For dusty products please inquire about – C Dust.
- The gross weigh baggers (GWM) have a minimum of moving parts for maximum efficiency and lower maintenance.




- For kraft paper, cotton, hessian, jute, PP/PE woven cloth and other bag materials.
- High-speed revolution 1,700 - 1,900 rpm.
- 8.5 mm (fixed) / 3 stitches per inch.
- Safety plastic handle for insulation.
- Automatic thread cutter.
- Uses needle: DNx1 #25.
- Oil pump lubrication. Uses Tellus #32 oil.
- Steel cam (no plastic parts).
- Minimum maintenance.




NP-7A SINGLE THREAD CHAIN STITCH

Ideal for closing bags for agricultural products, animal feeds, fertilizer, flour, chemicals, etc.

- Weight: 6kg(13 lbs.) with thread.
- Drive motor: 65~70W 50/60Hz, 1-ph.12V, 24V, 110V, 220V or 240V



PLAIN SEWN CLOSURE







DOUBLE THREAD CHAIN STITCH with one each needle and looper

4-BAGGER CONVEYOR WITH PORTABLE SEWING HEAD

DRAWINGS AND DIMENSIONS OF 4 BAG CONVEYOR:


VSD=VARIABLE SPEED DRIVE
W/STEP DOWN TRANSFORMER

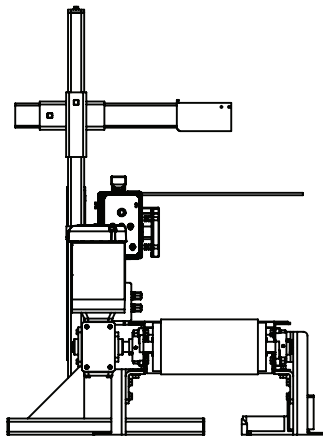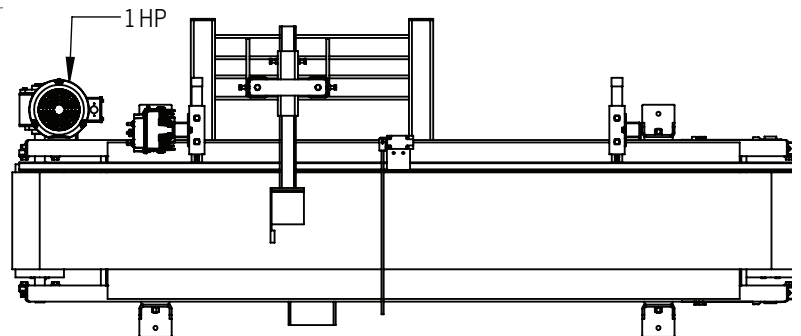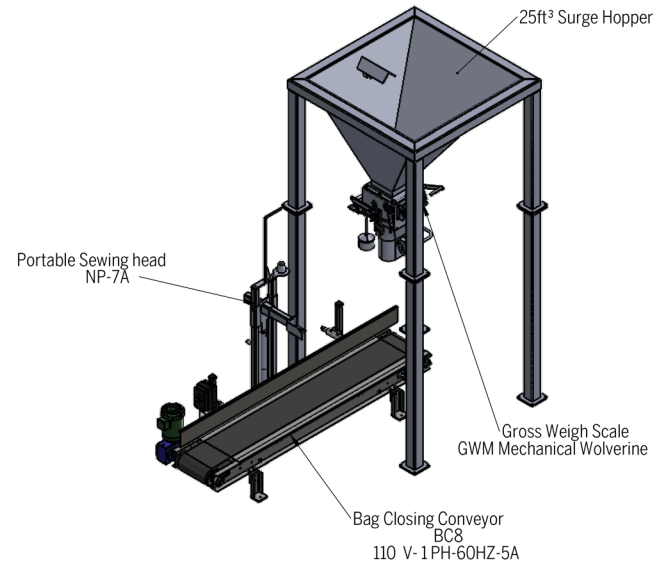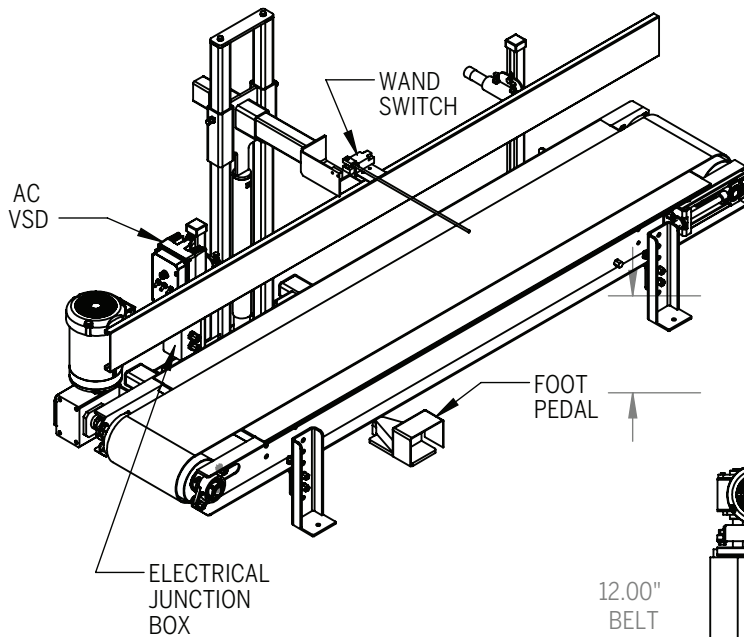

SCALE:1:24

4 BAGGER CONVEYOR
WITH PEDESTAL

12 1/2"-19 1/2"
ADJUSTABLE
HEIGHT

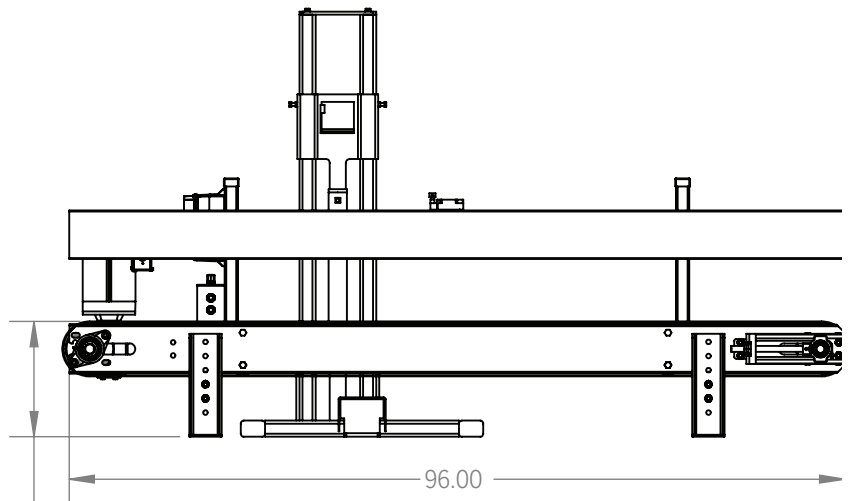

ELECTRICAL: 110V 1 PH @ 5 AMPS
220V 1 PH @ 5 AMPS



JEM International Inc. is the leading manufacturer of gross weight bagging scales and the Mattson family is honored to have sold thousands of systems in 60 countries for the past forty years.